


压缩泵 / Compressor

型号 **DP0410-X2** 12 V DC
DP0410-Y2 24 V DC



一般 / PWM
 可控兼用机型
 / PWM controllable

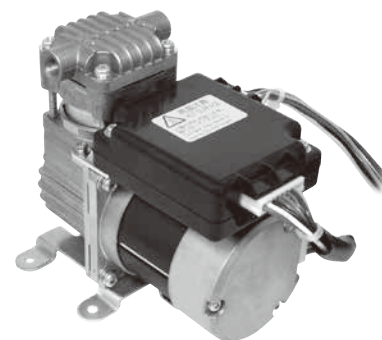

采用无碳刷马达
 / Brushless DC Motor

压缩泵专用 / Blower Type

空气量和电流 / Airflow & Electric Current

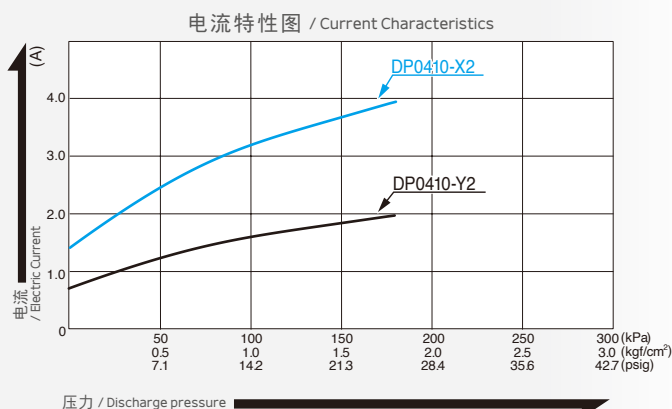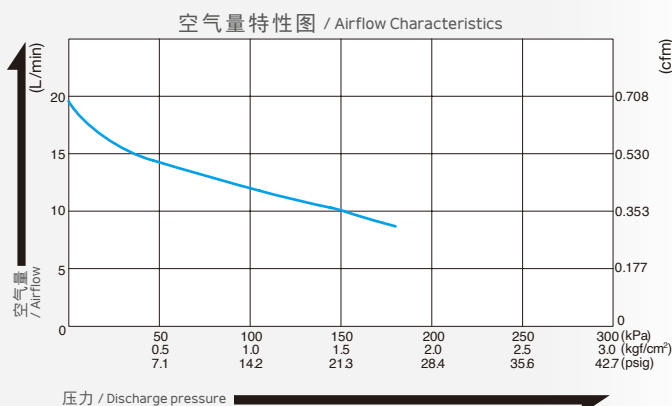


* 特性图只是参考值，并不是保证值。
 / The characteristic charts are for reference only and are not guaranteed.

规格 / Specifications


型号 / Model	DP0410-X2	DP0410-Y2
吐出空气量 / Free Air Displacement	18 L/min 0.64 cfm	
额定电压 / Rated Voltage	12 V DC	24 V DC
最大电流 / Maximum Current	5.0 A	2.7 A
最高压力 / Maximum Pressure	180 kPa (1.8 kgf/cm²) 1.8 bar 25.6 psig	
额定时间 / Duty Cycle	连续 / Continuous	
使用压力范围 / Working Pressure Range	0 ~ 180 kPa (0 ~ 1.8 kgf/cm²) 0 ~ 1.8 bar 0 ~ 25.6 psig	
耐用时间 (MTTF) / Rated Performance (MTTF)	10,000 小时 / hours	
吸入口尺寸 / Inlet	Rc1/8 (内螺纹 / internal thread)	
吐出口尺寸 / Outlet	Rc1/8 (内螺纹 / internal thread)	
线圈绝缘等级 / Coil Insulation Class	相当于 E 类 / Class E equivalent	
安装尺寸 / Mounting Dimensions	70 (L) x 45 (W) mm 2 - 3/4" (L) x 1 - 49/64" (W)	
本体重量 / Weight	1.1 kg 2.4 Lbs	
导线长度 / Leadwire Length	285 mm 11 - 7/32"	

用途例 / Application Examples

气缸 / 气动卡盘 / Air Cylinder/Chuck Driver



外形尺寸图 / External Dimensions (单位 / Unit : mm)

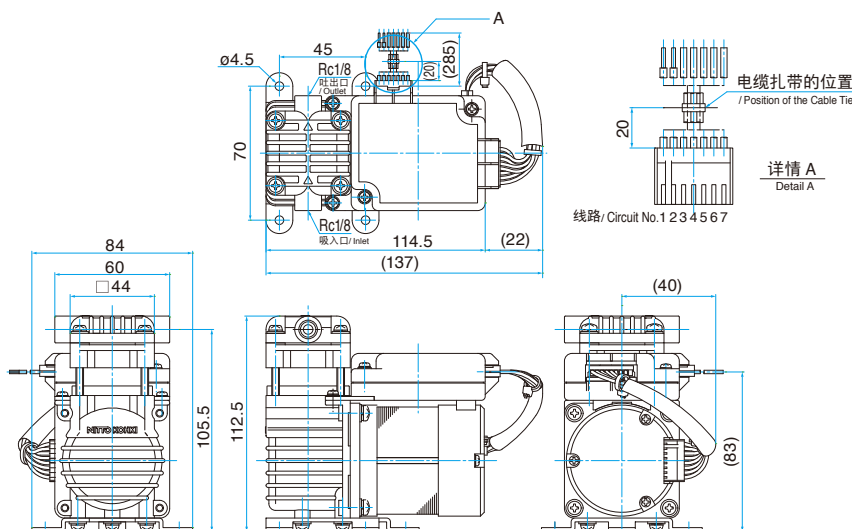

连接表 / Connection Table

		电源 / Power Source		控制信号 / Control Signal				
线路 / Circuit No.		1	2	3	4	5	6	7
线色 / Cord Color		红色 / Red	黑色 / Black	褐色 / Brown	橙色 / Orange	黄色 / Yellow	绿色 / Green	灰色 / Gray
机能 / Function		V+	V-	驱动 / 自由 DRIVE / FREE	脉冲 / PULSE	报警 / ALARM	速度 / SPEED	报警 / SIGNAL
选项 / Option	无控制 Off / Function Off	ON			OFF			
	有控制 On / Function On	ON			ON			
线尺寸 / Cord Size		AWG20			AWG22			
线路类型 / Line Type					UL1007			

* 控制功能默认情况下是“OFF”
 / Control function is "OFF" by default.

- 务必使用扎带固定引线。(请参见细节 A。) 如果它们没有固定, 连接器可能会接触不良并导致故障。
- 有关接线的详细信息, 请参阅用户说明。
- Be sure to secure the lead wires with a cable tie. (See the detail A.) If they are not secured, poor contact of the connector may occur and result in failure.
- For the details of wiring, please see the user's instructions.