




真空泵 / Vacuum Pump

型号 DVH130-X1 12 V DC
型号 DVH130-Y1 24 V DC

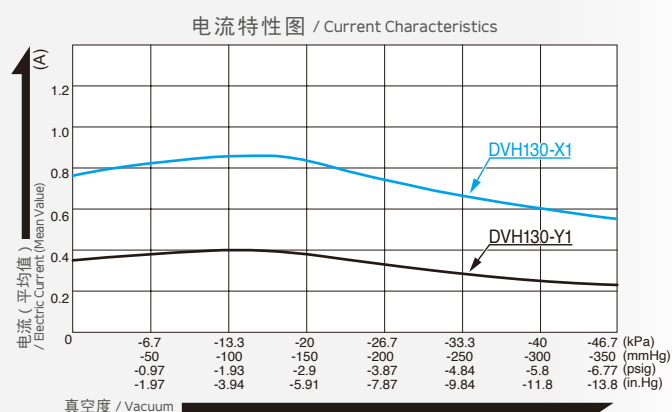

空气量和电流 / Airflow & Electric Current

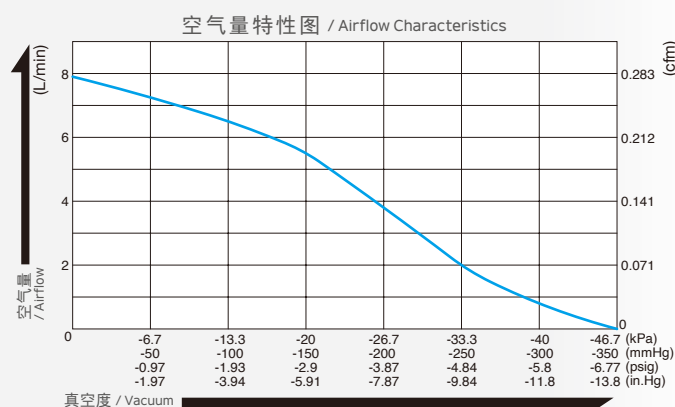

* 特性图只是参考值，并不是保证值。
 / The characteristic charts are for reference only and are not guaranteed.


规格 / Specifications

型号 / Model	DVH130-X1	DVH130-Y1
达到真空度 / Attainable Vacuum	-40 kPa (-300 mmHg) -400 mbar -11.8 in. Hg	
吐出空气量 / Rated Airflow	7 L/min* 0.247 cfm	
额定电压 / Rated Voltage	12 V DC	24 V DC
电流 (平均值) / Current (Mean Value)	0.86 A	0.41 A
消耗功率 / Power Consumption	10.3 W	10.0 W
耐用时间 (MTTF) / Rated Performance (MTTF)	10,000 小时 / hours	
吸入口尺寸 / Inlet	φ6 mm (外径) 软管接头 / 6 mm O.D. hose barb	
吐出口尺寸 / Outlet	φ6 mm (外径) 软管接头 / 6 mm O.D. hose barb	
额定时间 / Duty Cycle	连续 / Continuous	
线圈绝缘等级 / Coil Insulation Class	相当于 A 类 / Class A equivalent	
安装尺寸 / Mounting Dimensions	76 (L) x 70 (W) mm 2 - 63/64" (L) x 2 - 3/4" (W)	
本体重量 / Weight	0.91 kg	2.01 Lbs
导线长度 / Leadwire Length	300 mm 11 - 13/16"	

* 空载运转时的空气量。
 * Free air displacement at no-load operation.

可选附件 / Optional Accessory (LB07793)

如有需要，可提供重载橡胶脚垫。
 / Heavy duty rubber feet available on request.



用途例 / Application Examples

医疗设备、分析仪等
 / Medical equipment, analyzers, etc.

外形尺寸图 / External Dimensions (单位 / Unit : mm)

