

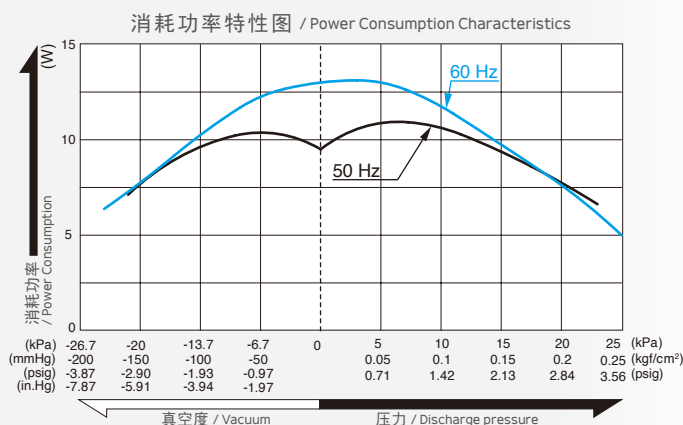


## 压缩泵 & 真空泵 / Compressor and Vacuum Pump

# 型号 VC0101

**兼用** / Dual Type

## 空气量和消耗功率 / Airflow &amp; Power Consumption

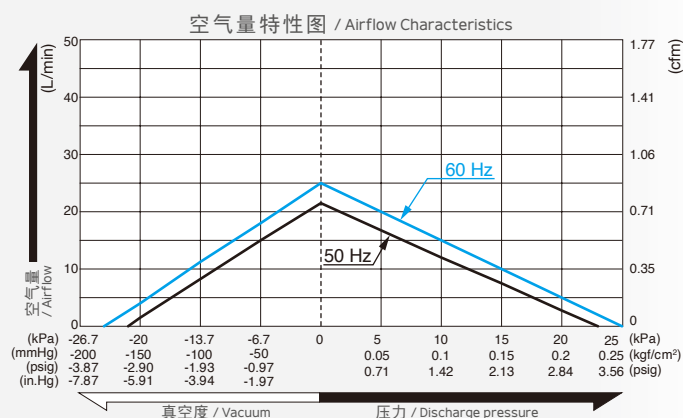


\* 特性图只是参考值，并不是保证值。  
/The characteristic charts are for reference only and are not guaranteed.

## 规格 / Specifications

|                                    |                                                                                                                  |                                                                                                               |
|------------------------------------|------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| 额定压力<br>/ Rated Pressure           | 10 kPa (0.1 kgf/cm <sup>2</sup> )<br>0.1 bar 1.42 psig                                                           |                                                                                                               |
| 吐出空气量<br>/ Rated Airflow           | 10 L/min 0.35 cfm                                                                                                |                                                                                                               |
| 额定电压 / Rated Voltage               | 120 V AC                                                                                                         | 230 V AC                                                                                                      |
| 额定频率 / Rated Frequency             | 60 Hz                                                                                                            | 50 Hz                                                                                                         |
| 消耗功率<br>/ Power Consumption        | 11 W                                                                                                             |                                                                                                               |
| 最高压力<br>/ Maximum Pressure         | 18 kPa (0.18 kgf/cm <sup>2</sup> )<br>0.18 bar 2.56 psig                                                         | 15 kPa (0.15 kgf/cm <sup>2</sup> )<br>0.15 bar 2.13 psig                                                      |
| 达到真空度<br>/ Attainable Vacuum       | -18.7 kPa (-140 mmHg)<br>-187 mbar<br>-5.51 in.Hg                                                                | -10 kPa (-76 mmHg)<br>-100 mbar<br>-2.95 in.Hg                                                                |
| 使用压力范围<br>/ Working Pressure Range | -18.7 kPa ~ 18 kPa<br>(-140 mmHg ~ 0.18 kgf/cm <sup>2</sup> )<br>-187 mbar ~ 0.18 bar<br>-5.51 in.Hg ~ 2.56 psig | -10 kPa ~ 15 kPa<br>(-76 mmHg ~ 0.15 kgf/cm <sup>2</sup> )<br>-100 mbar ~ 0.15 bar<br>-2.95 in.Hg ~ 2.13 psig |
| 耐用时间<br>/ Rated Performance        | 5,000 小时 / hours                                                                                                 |                                                                                                               |
| 吸入口尺寸 / Inlet                      | φ7.5 mm (外径) 软管接头 / 7.5 mm O.D. hose barb                                                                        |                                                                                                               |
| 吐出口尺寸 / Outlet                     | φ7.5 mm (外径) 软管接头 / 7.5 mm O.D. hose barb                                                                        |                                                                                                               |
| 额定时间 / Duty Cycle                  | 连续 / Continuous                                                                                                  |                                                                                                               |
| 线圈绝缘等级<br>/ Coil Insulation Class  | UL 规格品：相当于 B 类<br>/ Class B for UL                                                                               | 相当于 B 类<br>/ Class B equivalent                                                                               |
| 安装尺寸<br>/ Mounting Dimensions      | 66 (L) x 100 (W) mm<br>2 - 19/32" (L) x 3 - 15/16" (W)                                                           |                                                                                                               |
| 本体重量 / Weight                      | 0.82 kg 1.81 Lbs                                                                                                 | 0.84 kg 1.85 Lbs                                                                                              |
| 导线长度<br>/ Leadwire Length          | 300 mm<br>11 - 13/16"                                                                                            | 200 mm<br>7 - 7/8"                                                                                            |

## 用途例 / Application Examples

按摩器 / Massage Devices



防褥疮垫 / Bedsore Prevention Mattress



## 外形尺寸图 / External Dimensions (单位 / Unit : mm)

