


流量计/フローメーター

低压带模具专用阀门流量计
低压用 金型専用バルブ付き流量計

- 冷却水の流量可通过刻度确认，可减少因人为操作因素出现的冷却条件设定差异。
 - 内置小型流量调节阀，可自由设定每台机器的成形条件。
 - 具有成形条件的再现性，可缩短间隔时间。
 - 因单侧的螺钉部可左右自由旋转，让主体的安装、更换工作变得容易。
 - 冷却水の流量が目盛りで数値的に確認でき、作業者による冷却条件設定のばらつきを抑えます。
 - 小型ながら流量調節弁を内蔵、機械ごとの成形条件が自由に設定できます。
 - 成形条件の再現性があり、リードタイムの短縮が図れます。
 - 片側のねじ部が左右に自在に回転するため、本体の取り付け・交換作業が容易。
- *樹脂零件（刻度管）不能更换。/樹脂部品（目盛管）の交換はできません。

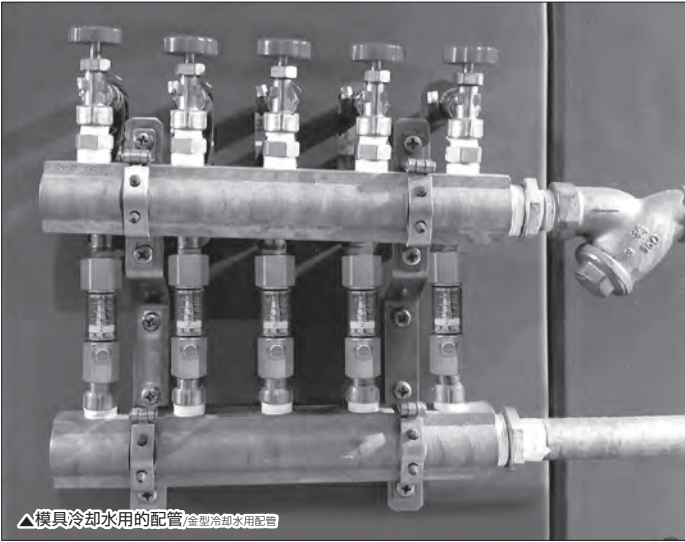

△模具冷却水用的配管/金型冷却水用配管


规格/仕様					
主体材质/本体材質		黄铜/真ちゅう			
外筒材质（刻度管）/外筒材質（目盛管）		聚碳酸酯/ポリカーボネート（PC）			
安装螺纹尺寸/取付ねじサイズ		Rc 3/8			
最高使用压力/最高使用圧力 MPa {kgf/cm²}		0.5 {5}			
使用流量范围/使用流量範囲 L/min		5~18			
密封材质/シール材質	密封材质/シール材質	标示号/表示記号	使用温度范围/使用温度範囲	附注/備考	
使用温度范围 注1/使用温度範囲	丁腈橡胶/ニトリルゴム	NBR	+10°C~+60°C	标准材质/標準材質	

注1) 可使用的温度范围根据使用条件而不同。/使用可能な温度範囲は、使用条件によって異なります。

推荐的最大紧固扭矩 / 推奨最大締付トルク		Nm {kgf·cm}
扭矩值/トルク値		11 {112}

流体的流向/流体の流れ方向

请让流体沿箭头方向流动。/流体は矢印の方向に流してください。

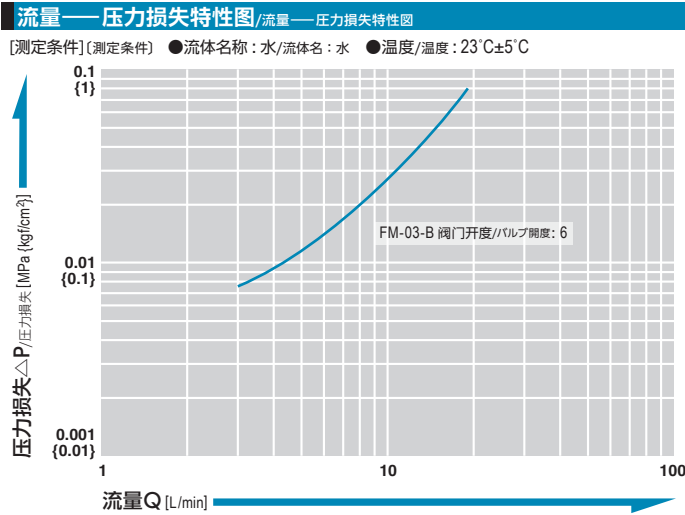

产品型号、尺寸表/製品型式・寸法表

Technical drawing of a flowmeter (FM-03-B) showing dimensions and labels. The device is cylindrical with a central flow tube. Labels include: T1 (螺母部/めねじ部) pointing to the left hexagonal nut, H2 pointing to the top of the right hexagonal nut, T2 (螺母部/めねじ部) pointing to the right hexagonal nut, D (overall height), H1 (height of the left section), L (overall length), and FLOW (direction of flow). The central tube has markings: 1/2" NPT, FLOW, and 1/2". The body is marked with FM-03-B and 183.

产品型号 製品型式	质量/質量 (g)	尺寸 / 寸法 (mm)					
		L	D	H1	H2	T1	T2
FM-03-B	190	(89)	(33)	六角23	六角26	Rc 3/8	Rc 3/8